



McDANIEL

Stainless Steel Case Utility Gauges

"For the price-conscious buyer . . .


McDaniel designed its utility gauges for the price-conscious buyer and user who have an emphasis on maintaining quality and accuracy in a general purpose gauge.

Our utility line offers trusted McDaniel quality in an economical package. Special consideration given to rigorous McDaniel standards for durability, accuracy, and quality of construction.

Our Series 7: General purpose stainless steel case utility gauges with brass internals. Designed for applications with a corrosive atmosphere.

Standard features include a restrictor screw (removable) in the inlet port for pulsation dampening.

. . . and quality user."

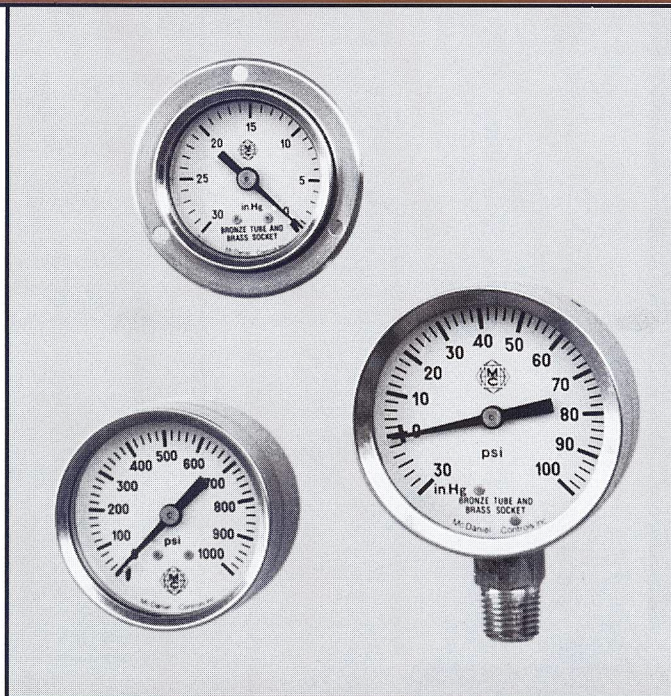

SPECIFICATIONS

Accuracy:

ASME B40.1 standard (Grade B) (3 - 2 - 3%)

Dial:

White polycarbonate. Black figures.

Case:

304 Stainless steel.

Pointer:

Black Polycarbonate.

Lens:

Polycarbonate.

Precision Movement

Brass.

Bourdon Tube:

Copper alloy (C Form 600 PSI & below).

Phosphorous bronze (Spiral 800 PSI & above).

Temperature Utilization:

-4 + 176 degrees Fahrenheit.

-20 + 80 degrees Celsius.

Pressure Utilization:

Static: 75% maximum scale.

Dynamic: 66% maximum scale.

Stem and Socket:

Brass. Restrictor screw standard. (removable)

R7 = 1/8" NPT (1/4" NPT special order available)

T7 = 1/4" or 1/8" NPT available

J7 = 1/4" NPT (1/8" NPT special order available)

Dial Sizes / Ranges Available

1 1/2" - (R7) / Vac, Comp, Rec 3-15, up to 5,000 psi

2" - (T7) / Vac, Comp, Rec 3-15, up to 5,000 psi

2 1/2" - (J7) / Vac, Comp, Rec 3-15, up to 15,000 psi

Configurations Available:

Bottom connected standard

(L) = Center-back connected

(P) = Front flange, Center-back connected

McDaniel Controls, Inc.


P. O. Box 187, Luling, LA 70070 • 14148 Highway 90, Boutte, LA 70039 U.S.A.

(985) 758-2782 • New Orleans (504) 467-1333 • Fax (985) 758-1688

www.mcdanielcontrols.com

DIMENSIONAL DATA

In millimeters (mm) and Inches (in.)

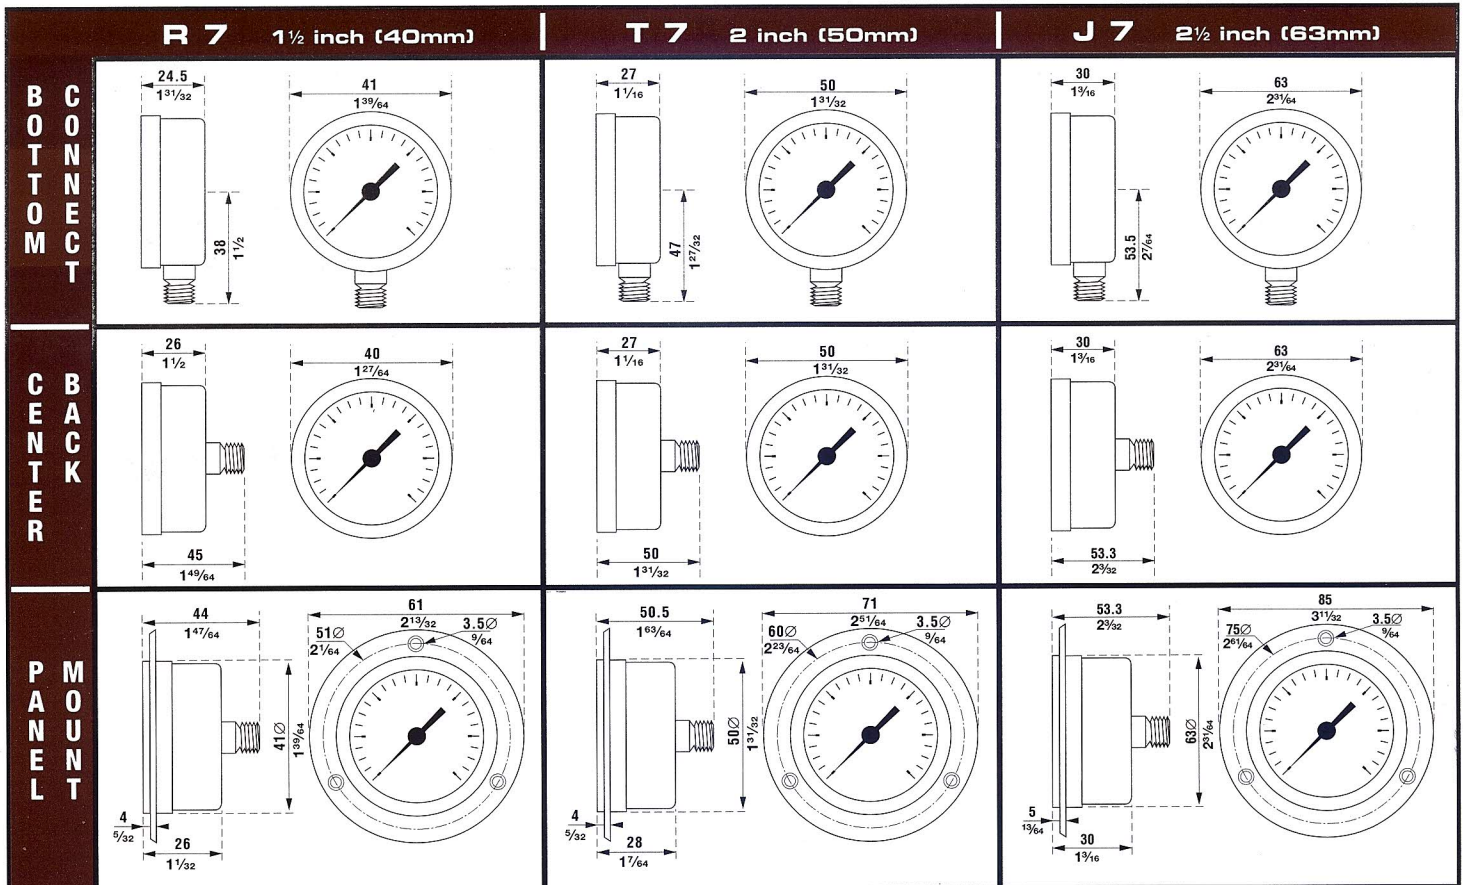

* See website for dimensional data and downloadable AutoCAD files: www.mcdanielcontrols.com

Range code	Range psi	Minor Increments
A	0 - 15	.5
B	0 - 30	1
C	0 - 60	1
D	0 - 100	2
E	0 - 160	5
F	0 - 200	5
G	0 - 300	10
H	0 - 400	10
I	0 - 600	20
J	0 - 800	20
K	0 - 1000	20
L	0 - 1500	50
M	0 - 2000	50
N	0 - 3000	100
4k	0 - 4000	100
O	0 - 5000	100
6k	0 - 6000	200
P	0 - 10000	200
Q	0 - 15000	500
VACUUM	VACUUM	VACUUM
S	VAC 30"Hg - 0	1
RECEIVER	RECEIVER	RECEIVER
T	REC 3 - 15"	2
COMPOUND	COMPOUND	COMPOUND
U	30"Hg + 15	1-0-2
V	30"Hg + 30	1-0-2
W	30"Hg + 60	2-0-5
X	30"Hg + 100	2-0-5
Y	30"Hg + 160	2-0-10
2k	30"Hg + 200	5-0-15
Z	30"Hg + 300	10-0-30

McDaniel also makes gauges in other materials; in sizes and ranges to fit a wide variety of applications, and in many special configurations.

Ask your representative about McDaniel gauges with stainless steel or Monel® internals, all brass or all stainless steel gauges, test gauges, or other requirements.

® Monel is a registered trademark of INCO family of companies.

HOW TO ORDER

- Select the model number (R7, T7, or J7)
- Specify range code from list at left.
- Specify mounting code:

(Bottom connection is standard, no code)

"L" = (Center-back connection)

"P" = (Panel mount w/front flange, Center-back connection)

- Specify any other special configurations or options. (special NPT size, dual-scales, etc.)

Model

(Example: R7DP: "R7" = 1 1/2" (40mm) Dial - "D" = (0 - 100 psi range) - "P" = (Panel Mount)

T7E: "T7" = 2" (50mm) Dial - "E" = (0 - 160 psi range)

J72k: "J7" = 2 1/2" (63mm) Dial - "2k" = (30"Hg + 200 psi range)

Special Configuration Adder Codes

B = psi/Bar (dual scale) (nonstock)

K = psi/kPa (dual scale) (nonstock)

1/8 = 1/8" NPT (use on T7 (stock), and J7 non stock)

Limited Warranty

McDaniel warrants our utility gauges to be free of defects in material and workmanship: Replacement of any defective gauge will be made at no cost to the purchaser. Gauge failures determined to be caused by over-range and incompatibility with environment/product media or abuse will not be considered under this warranty.

* Receiver gauge is dual scale.
(0 - 100% primary, 0 - 10 square root secondary)

DISTRIBUTED BY:

Chirico Scientific

www.chiricoscientific.com

It is recommended that users of pressure gauges become familiar with American National Standard ASME B40.1, entitled Gauges, Pressure and Vacuum - Indicating Dial Type - Elastic Element. This specification is available from:

American Society of Mechanical Engineers

3 Park Avenue
New York, New York 10016
Phone: 212-591-7722